

PRODUCT INFORMATION PACKET



Model No: OAN470
Catalog No: OAN470
1/4 HP OEM Replacement Motor, 3200 RPM, 460/380-415 Volts, 48 Frame, OAO
HVAC/R OEM Replacement Motors



Regal and Century are trademarks of Regal Beloit Corporation or one of its affiliated companies.
©2020 Regal Beloit Corporation, All Rights Reserved. MC017097E

REGAL



Nameplate Specifications

Output HP	1/4 Hp	Output KW	0.19 kW
Frequency	60 Hz	Voltage	460/380-415 V
Current	0.9 A	Speed	3200 rpm
Service Factor	1	Phase	1
Duty	Continuous	Insulation Class	B
Frame	48Y	Enclosure	Open Enclosed
Thermal Protection	Automatic	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N		


Technical Specifications

Electrical Type	Permanent Split Capacitor	Starting Method	Across The Line
Poles	2	Rotation	Counterclockwise Lead End
Mounting	Round Belly Band	Motor Orientation	Horizontal
Drive End Bearing	Ball	Opp Drive End Bearing	Ball
Frame Material	Rolled Steel	Shaft Type	Flat
Overall Length	8.74 in	Frame Length	4.98 in
Shaft Diameter	0.500 in	Shaft Extension	3-1/4 in
Connection Drawing	628042	Outline Drawing	F48AD51A01


This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:22/09/2020

4		3		2		1																																																				
GENERAL INFORMATION: SHAFT RUNOUT: .001 [.03] T.I.R. PER INCH LENGTH OF EXTENSION BEARINGS: BALL MOUNTING POSITION: HORIZONTAL ELECTRICAL DATA: OVERLOAD PROTECTOR: AUTOMATIC RESET (T.I. 7AM 036) LEADS: NO. 18 GA., .03 THK. 125°C INSUL.				REV C		ECO 0025553		REV BY F. MORENO		DATE 05-01-2012		APPD M. AVILA		DATE 05-01-2012																																												
NAMEPLATE DATA: MODEL NO.: F48AD51A01 CUST. P/N: OAN470 HP: 1/4 ROT.: CCWLE RPM: 3200 TYPE: F FRAME: 48Y VOLTS: 460/380-415 PH: 1 AMPS: 0.9 HZ: 60/50 INS.: B AMB.: 40°C DUTY: CONT. CAP.: 5 MFD/370 V ENCL: OPEN UL LOGO CSA LOGO THERMALLY PROTECTED				EXTERNAL CONNECTION DIAGRAM CONNECTION DIAGRAM BROWN SEP. CAP. BRN/WHT WHITE BLACK LINE		CCW ROT. ø5.70 [144.9] MAX 8.74 [222.0] 5.49 [139.4] 3.25 [82.5] 2.75 [69.8] USABLE FLAT ø.4998(-.0005) [ø12.695(-.0127)] .453±.005 [11.51±.13] FLAT TOP OF NAMEPLATE THRU-BOLTS TBA832-606 (4 REQUIRED) ON A ø5.147[ø130.73]. .50±.06 [12.7±1.5] EXT BEYOND NUT TOP OF WARNING STICKER																																																				
<table border="1" style="width: 100%; border-collapse: collapse;"><thead><tr><th>PREFORMANCE CURVE NO.</th><th>TORQUE @3200 RPM (25°C)</th><th>APPROVED SAMPLE</th><th>UL COMPONENT</th><th colspan="2">CSA</th></tr><tr><th></th><th></th><th></th><th>FILE #</th><th>CCN #</th><th>FILE #</th><th>CLASS #</th></tr></thead><tbody><tr><td>C32035</td><td>7.8 OZ.FT</td><td>0142911A</td><td>E46412</td><td>PRGY2</td><td>LR43341</td><td>4211-01</td></tr></tbody></table>				PREFORMANCE CURVE NO.	TORQUE @3200 RPM (25°C)	APPROVED SAMPLE	UL COMPONENT	CSA					FILE #	CCN #	FILE #	CLASS #	C32035	7.8 OZ.FT	0142911A	E46412	PRGY2	LR43341	4211-01	<table border="1" style="width: 100%; border-collapse: collapse;"><thead><tr><th>COLOR</th><th>LENGTH</th><th>TERMINAL OR STRIP LENGTH</th></tr></thead><tbody><tr><td>BROWN</td><td>11.0/12.0 [279/305]</td><td>.25[6.4] FLAG</td></tr><tr><td>BROWN/WHITE</td><td>11.0/12.0 [279/305]</td><td>.25[6.4] FLAG</td></tr><tr><td>BLACK</td><td>11.0/12.0 [279/305]</td><td>.50[12.7] SKIN</td></tr><tr><td>WHITE</td><td>11.0/12.0 [279/305]</td><td>.50[12.7] SKIN</td></tr></tbody></table>		COLOR	LENGTH	TERMINAL OR STRIP LENGTH	BROWN	11.0/12.0 [279/305]	.25[6.4] FLAG	BROWN/WHITE	11.0/12.0 [279/305]	.25[6.4] FLAG	BLACK	11.0/12.0 [279/305]	.50[12.7] SKIN	WHITE	11.0/12.0 [279/305]	.50[12.7] SKIN	<table border="1" style="width: 100%; border-collapse: collapse;"><thead><tr><th colspan="2">LEAD DATA</th></tr></thead><tbody><tr><td>MAIN FRAME - OLE</td><td>OPEN</td></tr><tr><td>END FRAME - OLE</td><td>OPEN</td></tr><tr><td>MAIN FRAME - LE</td><td>OPEN</td></tr><tr><td>END FRAME - LE</td><td>OPEN</td></tr></tbody></table>		LEAD DATA		MAIN FRAME - OLE	OPEN	END FRAME - OLE	OPEN	MAIN FRAME - LE	OPEN	END FRAME - LE	OPEN	<table border="1" style="width: 100%; border-collapse: collapse;"><thead><tr><th>CUSTOMER</th><th>DISTRIBUTION SERVICE</th></tr></thead><tbody><tr><td></td><td></td></tr></tbody></table>		CUSTOMER	DISTRIBUTION SERVICE		
PREFORMANCE CURVE NO.	TORQUE @3200 RPM (25°C)	APPROVED SAMPLE	UL COMPONENT	CSA																																																						
			FILE #	CCN #	FILE #	CLASS #																																																				
C32035	7.8 OZ.FT	0142911A	E46412	PRGY2	LR43341	4211-01																																																				
COLOR	LENGTH	TERMINAL OR STRIP LENGTH																																																								
BROWN	11.0/12.0 [279/305]	.25[6.4] FLAG																																																								
BROWN/WHITE	11.0/12.0 [279/305]	.25[6.4] FLAG																																																								
BLACK	11.0/12.0 [279/305]	.50[12.7] SKIN																																																								
WHITE	11.0/12.0 [279/305]	.50[12.7] SKIN																																																								
LEAD DATA																																																										
MAIN FRAME - OLE	OPEN																																																									
END FRAME - OLE	OPEN																																																									
MAIN FRAME - LE	OPEN																																																									
END FRAME - LE	OPEN																																																									
CUSTOMER	DISTRIBUTION SERVICE																																																									
GEOMETRIC CHARACTERISTICS & SYMBOLS □ FLATNESS — STRAIGHTNESS ∠ ANGULARITY ⊥ PERPENDICULARITY (SQUARENESS) // PARALLELISM ○ ROUNDNESS (CIRCULARITY) ⊘ CYLINDRICITY △ PROFILE OF ANY SURFACE △ PROFILE OF ANY LINE ↑ RUNOUT ⊕ TRUE POSITION ⊙ CONCENTRICITY ⊖ SYMMETRY ASME Y14.5M 1994				REGAL-BELOIT CORPORATION (RBC) PROVIDES TECHNICAL ASSISTANCE TO OUR CUSTOMERS IN SEVERAL AREAS. SINCE RBC DOES NOT RECEIVE ALL DATA CONCERNING THE USE AND APPLICATION OF THE MOTOR, THE SUITABILITY OF THE MOTOR FOR THE APPLICATION MUST BE DETERMINED BY THE CUSTOMER. DIMENSIONS WITHOUT TOLERANCES ARE FOR REFERENCE ONLY.		DR BY: MH 10-23-2009		 REGAL-BELOIT CORPORATION																																																		
						APPD: TR 10-23-2009																																																				
THIRD ANGLE PROJECTION				EDS DATE 11-11-2011 FORMAT REV G		DESCRIPTION MODEL-RFHP-48FR OUTLINE																																																				
				CONFIDENTIAL: THIS DRAWING AND ITS INFORMATION ARE THE EXCLUSIVE AND CONFIDENTIAL PROPERTY OF REGAL-BELOIT CORPORATION AND ARE NOT TO BE DISCLOSED, DUPLICATED, DISTRIBUTED OR OTHERWISE USED WITHOUT THE WRITTEN CONSENT OF REGAL-BELOIT CORPORATION. -ALL RIGHTS RESERVED.																																																						
SIZE C				DWG NO F48AD51A01		SCALE NONE		SHEET 1																																																		

4	3	2	1																										
INFORMACION GENERAL: OSCILACION DE FLECHA: .001 [.03] T.I.R. PER INCH LENGTH OF EXTENSION BALEROS: BALL POSICION DEL MONTAJE: HORIZONTAL INFORMACION ELECTRICA: PROTECTOR DE SOBRECARGA: AUTOMATIC RESET (T.I. 7AM 036) CABLES: NO. 18 GA., .03 THK. 125°C INSUL.		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>REVISION:</td> <td>ECO</td> <td>REVISADO POR:</td> <td>F. MORENO</td> <td>FECHA:</td> <td>05-01-2012</td> <td>APROBADO POR:</td> <td>M. AVILA</td> <td>FECHA:</td> <td>05-01-2012</td> </tr> <tr> <td>C</td> <td>0025553</td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> </tr> </table>		REVISION:	ECO	REVISADO POR:	F. MORENO	FECHA:	05-01-2012	APROBADO POR:	M. AVILA	FECHA:	05-01-2012	C	0025553														
REVISION:	ECO	REVISADO POR:	F. MORENO	FECHA:	05-01-2012	APROBADO POR:	M. AVILA	FECHA:	05-01-2012																				
C	0025553																												
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;"> PLACA DE DATOS: MODEL NO.: F48AD51A01 CUST. P/N: OAN470 HP: 1/4 ROT.: CCWLE RPM: 3200 TYPE: F FRAME: 48Y VOLTS: 460/380-415 PH: 1 AMPS: 0.9 HZ: 60/50 INS.: B AMB.: 40°C DUTY: CONT. CAP.: 5 MFD/370 V ENCL: OPEN UL LOGO CSA LOGO THERMALLY PROTECTED </td> <td style="width: 50%;"> DIAGRAMA DE CONEXION EXTRNA CONNECTION DIAGRAM BROWN SEP. CAP. BRN/WHT WHITE BLACK LINE </td> </tr> </table>		PLACA DE DATOS: MODEL NO.: F48AD51A01 CUST. P/N: OAN470 HP: 1/4 ROT.: CCWLE RPM: 3200 TYPE: F FRAME: 48Y VOLTS: 460/380-415 PH: 1 AMPS: 0.9 HZ: 60/50 INS.: B AMB.: 40°C DUTY: CONT. CAP.: 5 MFD/370 V ENCL: OPEN UL LOGO CSA LOGO THERMALLY PROTECTED	DIAGRAMA DE CONEXION EXTRNA CONNECTION DIAGRAM BROWN SEP. CAP. BRN/WHT WHITE BLACK LINE	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;"> CAFE CAFE/BLANCO NEGRO BLANCO </td> <td style="width: 33%;"> 11.0/12.0 [279/305] 11.0/12.0 [279/305] 11.0/12.0 [279/305] 11.0/12.0 [279/305] </td> <td style="width: 33%;"> .25[6.4] BANDERA .25[6.4] BANDERA .50[12.7] FORRO .50[12.7] FORRO </td> </tr> <tr> <td>COLOR</td> <td>LONGITUD</td> <td>TERMINAL O LONGITUD DE DESFORRE</td> </tr> </table>		CAFE CAFE/BLANCO NEGRO BLANCO	11.0/12.0 [279/305] 11.0/12.0 [279/305] 11.0/12.0 [279/305] 11.0/12.0 [279/305]	.25[6.4] BANDERA .25[6.4] BANDERA .50[12.7] FORRO .50[12.7] FORRO	COLOR	LONGITUD	TERMINAL O LONGITUD DE DESFORRE																		
PLACA DE DATOS: MODEL NO.: F48AD51A01 CUST. P/N: OAN470 HP: 1/4 ROT.: CCWLE RPM: 3200 TYPE: F FRAME: 48Y VOLTS: 460/380-415 PH: 1 AMPS: 0.9 HZ: 60/50 INS.: B AMB.: 40°C DUTY: CONT. CAP.: 5 MFD/370 V ENCL: OPEN UL LOGO CSA LOGO THERMALLY PROTECTED	DIAGRAMA DE CONEXION EXTRNA CONNECTION DIAGRAM BROWN SEP. CAP. BRN/WHT WHITE BLACK LINE																												
CAFE CAFE/BLANCO NEGRO BLANCO	11.0/12.0 [279/305] 11.0/12.0 [279/305] 11.0/12.0 [279/305] 11.0/12.0 [279/305]	.25[6.4] BANDERA .25[6.4] BANDERA .50[12.7] FORRO .50[12.7] FORRO																											
COLOR	LONGITUD	TERMINAL O LONGITUD DE DESFORRE																											
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">CURVAS DE FUNCIONAMIENTO</td> <td style="width: 33%;">TORSION @3200 RPM (25°C)</td> <td style="width: 33%;">MUESTRA APROBADA</td> <td style="width: 33%;">COMPONENTE UL</td> <td style="width: 33%;">CSA</td> </tr> <tr> <td>C32035</td> <td>7.8 OZ.FT</td> <td>0142911A</td> <td>E46412 PRGY2</td> <td>LR43341 4211-01</td> </tr> </table>		CURVAS DE FUNCIONAMIENTO	TORSION @3200 RPM (25°C)	MUESTRA APROBADA	COMPONENTE UL	CSA	C32035	7.8 OZ.FT	0142911A	E46412 PRGY2	LR43341 4211-01	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 33%;">CARCASA - LOC</td> <td style="width: 33%;">ABIERTO</td> <td style="width: 33%;">CLIENTE</td> <td style="width: 33%;">DISTRIBUTION SERVICE</td> </tr> <tr> <td>TAPA - LOC</td> <td>ABIERTO</td> <td></td> <td></td> </tr> <tr> <td>CARCASA - LC</td> <td>ABIERTO</td> <td></td> <td></td> </tr> <tr> <td>TAPA - LC</td> <td>ABIERTO</td> <td></td> <td></td> </tr> </table>		CARCASA - LOC	ABIERTO	CLIENTE	DISTRIBUTION SERVICE	TAPA - LOC	ABIERTO			CARCASA - LC	ABIERTO			TAPA - LC	ABIERTO		
CURVAS DE FUNCIONAMIENTO	TORSION @3200 RPM (25°C)	MUESTRA APROBADA	COMPONENTE UL	CSA																									
C32035	7.8 OZ.FT	0142911A	E46412 PRGY2	LR43341 4211-01																									
CARCASA - LOC	ABIERTO	CLIENTE	DISTRIBUTION SERVICE																										
TAPA - LOC	ABIERTO																												
CARCASA - LC	ABIERTO																												
TAPA - LC	ABIERTO																												
CARACTERISTICAS DE GEOMETRIA Y SIMBOLOS □ PLANICIDAD — RECTITUD < ANGULARIDAD ⊥ PERPENDICULARIDAD (A ESQUADRA) // PARALELISMO ○ REDONDEZ (CIRCULARIDAD) R CILINDRICIDAD A PERFIL DE CUALQUIER SUPERFICIE ~ PERFIL DE CUALQUIER LINEA ↑ VARIACION ⊕ POSICION REAL ⊙ CONCENTRICIDAD ∓ SIMETRIA		REGAL-BELOIT CORPORATION (RBC) PROVEE ASISTENCIA TECNICA A NUESTROS CLIENTES EN VARIAS AREAS. DESDE QUE RBC NO RECIBE TODOS LOS DATOS EN RELACION AL USO Y A LA APLICACION DEL MOTOR, LA APLICACION ADECUADA DEL MOTOR DEBE SER DETERMINADA POR EL CLIENTE. DIMENSIONES SIN TOLERANCIA SON DE REFERENCIA SOLAMENTE																											
DIBUJADO POR: MH APROBADO POR: TR FECHA EDS: 11-11-2011 REV. FORMATO: G CONFIDENCIAL: ESTE DIBUJO Y SU INFORMACION SON PROPIEDAD DE USO EXCLUSIVO Y CONFIDENCIAL DE REGAL-BELOIT CORPORATION. Y NO DEBERAN SER REVELADOS, DUPLICADOS, DISTRIBUIDOS O USARSE DE OTRA MANERA SIN EL CONSENTIMIENTO ESCRITO DE REGAL-BELOIT CORPORATION. -TODOS LOS DERECHOS RESERVADOS.		DESCRIPCION: MODEL-RFHP-48FR OUTLINE TAMANO: C NUMERO DE DIBUJO: F48AD51A01 ESCALA: NONE HOJA: 1																											

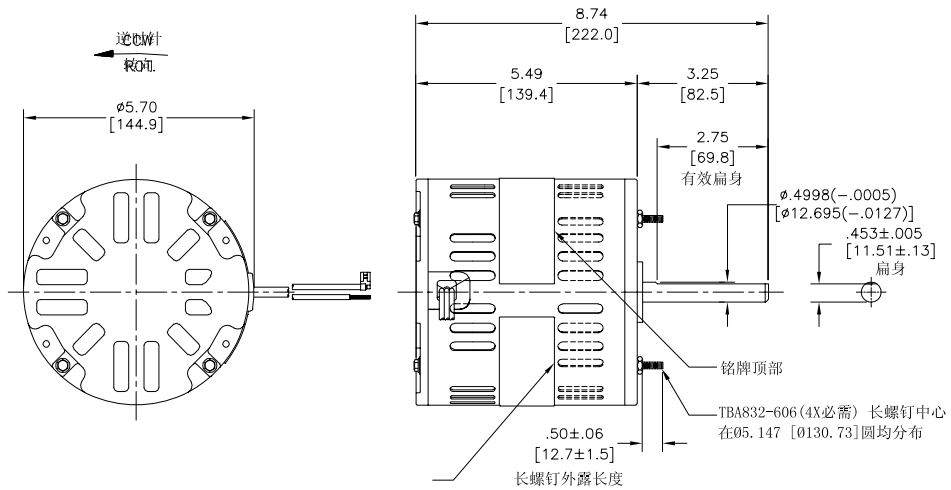4		3		2		1																		
总技术要求:				版本	ECO	编制	日期	批准	日期															
轴跳动: .001 [0.025] PER INCH LENGTH OF EXTENSION				C	0025553	F. MORENO	05-01-2012	M. AVILA	05-01-2012															
轴承: 滚动轴承																								
安装位置: HORIZONTAL																								
电气数据:																								
AUTOMATIC RESET (T.I. 7AM 036)																								
NO. 18 GA., .03 THK. 125°C INSUL.																								
																								
<table border="1"><thead><tr><th>铭牌数据</th><th>外部连接详图</th></tr></thead><tbody><tr><td>MODEL NO.: F48AD51A01 CUST. P/N: OAN470 HP: 1/4 ROT.: CCWLE RPM: 3200 TYPE: F FRAME: 48Y VOLTS: 460/380-415 PH: 1 AMPS: 0.9 HZ: 60/50 INS.: B AMB.: 40°C DUTY: CONT. CAP.: 5 MFD/370 V ENCL: OPEN UL LOGO CSA LOGO THERMALLY PROTECTED</td><td> CONNECTION DIAGRAM BROWN SEP. CAP. BRN/WHT WHITE BLACK LINE 614131-007 </td></tr></tbody></table>		铭牌数据	外部连接详图	MODEL NO.: F48AD51A01 CUST. P/N: OAN470 HP: 1/4 ROT.: CCWLE RPM: 3200 TYPE: F FRAME: 48Y VOLTS: 460/380-415 PH: 1 AMPS: 0.9 HZ: 60/50 INS.: B AMB.: 40°C DUTY: CONT. CAP.: 5 MFD/370 V ENCL: OPEN UL LOGO CSA LOGO THERMALLY PROTECTED	CONNECTION DIAGRAM BROWN SEP. CAP. BRN/WHT WHITE BLACK LINE 614131-007																			
铭牌数据	外部连接详图																							
MODEL NO.: F48AD51A01 CUST. P/N: OAN470 HP: 1/4 ROT.: CCWLE RPM: 3200 TYPE: F FRAME: 48Y VOLTS: 460/380-415 PH: 1 AMPS: 0.9 HZ: 60/50 INS.: B AMB.: 40°C DUTY: CONT. CAP.: 5 MFD/370 V ENCL: OPEN UL LOGO CSA LOGO THERMALLY PROTECTED	CONNECTION DIAGRAM BROWN SEP. CAP. BRN/WHT WHITE BLACK LINE 614131-007																							
<table border="1"><thead><tr><th>颜色</th><th>长度</th><th>端子或剥线长度</th></tr></thead><tbody><tr><td>褐色</td><td>11.0/12.0 [279/305]</td><td>.25[6.4] 铲形插</td></tr><tr><td>褐色/白色</td><td>11.0/12.0 [279/305]</td><td>.25[6.4] 铲形插</td></tr><tr><td>黑色</td><td>11.0/12.0 [279/305]</td><td>.50[12.7] 剥线长</td></tr><tr><td>白色</td><td>11.0/12.0 [279/305]</td><td>.50[12.7] 剥线长</td></tr></tbody></table>		颜色	长度	端子或剥线长度	褐色	11.0/12.0 [279/305]	.25[6.4] 铲形插	褐色/白色	11.0/12.0 [279/305]	.25[6.4] 铲形插	黑色	11.0/12.0 [279/305]	.50[12.7] 剥线长	白色	11.0/12.0 [279/305]	.50[12.7] 剥线长								
颜色	长度	端子或剥线长度																						
褐色	11.0/12.0 [279/305]	.25[6.4] 铲形插																						
褐色/白色	11.0/12.0 [279/305]	.25[6.4] 铲形插																						
黑色	11.0/12.0 [279/305]	.50[12.7] 剥线长																						
白色	11.0/12.0 [279/305]	.50[12.7] 剥线长																						
<table border="1"><thead><tr><th>颜色</th><th>长度</th><th>端子或剥线长度</th></tr></thead><tbody><tr><td>褐色</td><td>11.0/12.0 [279/305]</td><td>.25[6.4] 铲形插</td></tr><tr><td>褐色/白色</td><td>11.0/12.0 [279/305]</td><td>.25[6.4] 铲形插</td></tr><tr><td>黑色</td><td>11.0/12.0 [279/305]</td><td>.50[12.7] 剥线长</td></tr><tr><td>白色</td><td>11.0/12.0 [279/305]</td><td>.50[12.7] 剥线长</td></tr></tbody></table>		颜色	长度	端子或剥线长度	褐色	11.0/12.0 [279/305]	.25[6.4] 铲形插	褐色/白色	11.0/12.0 [279/305]	.25[6.4] 铲形插	黑色	11.0/12.0 [279/305]	.50[12.7] 剥线长	白色	11.0/12.0 [279/305]	.50[12.7] 剥线长								
颜色	长度	端子或剥线长度																						
褐色	11.0/12.0 [279/305]	.25[6.4] 铲形插																						
褐色/白色	11.0/12.0 [279/305]	.25[6.4] 铲形插																						
黑色	11.0/12.0 [279/305]	.50[12.7] 剥线长																						
白色	11.0/12.0 [279/305]	.50[12.7] 剥线长																						
<table border="1"><thead><tr><th>非引线端机壳</th><th>开启方式</th></tr></thead><tbody><tr><td>非引线端端盖</td><td>开放</td></tr><tr><td>引线端机壳</td><td>开放</td></tr><tr><td>引线端端盖</td><td>开放</td></tr></tbody></table>		非引线端机壳	开启方式	非引线端端盖	开放	引线端机壳	开放	引线端端盖	开放															
非引线端机壳	开启方式																							
非引线端端盖	开放																							
引线端机壳	开放																							
引线端端盖	开放																							
<table border="1"><thead><tr><th>用户</th><th>DISTRIBUTION SERVICE</th></tr></thead><tbody><tr><td></td><td></td></tr></tbody></table>		用户	DISTRIBUTION SERVICE																					
用户	DISTRIBUTION SERVICE																							
<table border="1"><thead><tr><th>名称</th><th>图号</th></tr></thead><tbody><tr><td>MODEL-RFHP-48FR OUTLINE</td><td>F48AD51A01</td></tr></tbody></table>		名称	图号	MODEL-RFHP-48FR OUTLINE	F48AD51A01																			
名称	图号																							
MODEL-RFHP-48FR OUTLINE	F48AD51A01																							
<table border="1"><thead><tr><th>比例</th><th>图幅</th><th>图号</th></tr></thead><tbody><tr><td>NONE</td><td></td><td>1</td></tr></tbody></table>		比例	图幅	图号	NONE		1																	
比例	图幅	图号																						
NONE		1																						

628042

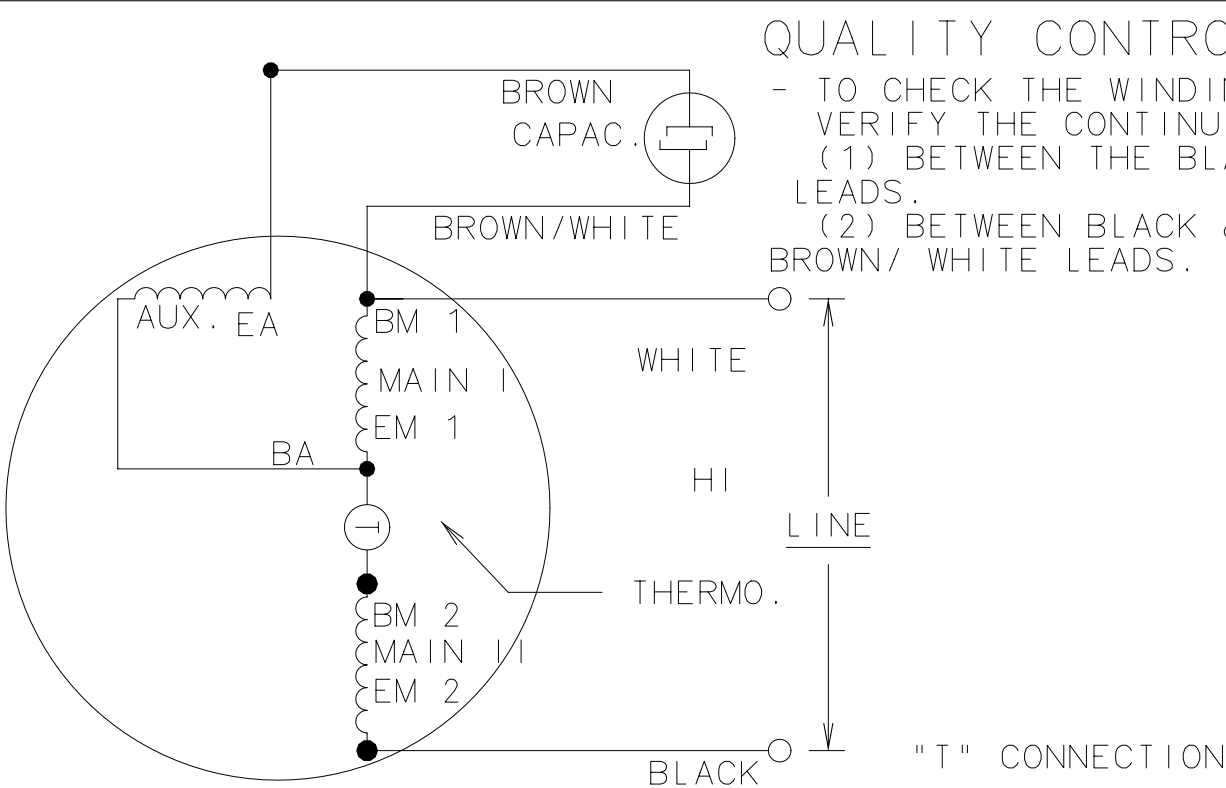

QUALITY CONTROL NOTE:
- TO CHECK THE WINDINGS FOR OPENS, VERIFY THE CONTINUITY
(1) BETWEEN THE BLACK & BROWN LEADS.
(2) BETWEEN BLACK & WHITE OR BROWN/ WHITE LEADS.

				MATERIAL		PROCESS		A.O.SMITH ELECTRICAL PRODUCTS COMPANY TIPP CITY, OHIO		A DIVISION OF A.O.SMITH CORPORATION  COPYRIGHT 1992	
DATE	CHANGED FROM	NOTICE		FIRST MODEL F48S08A27		SHEET 1 OF 1		DRAWN BY Mcguire		DESCRIPTION DIAG. MLW FR42 TYPE FLL	
				NO. OF MODELS 1		REFERENCE NONE		APPROVED BY		REL. DATE 10/30/01	
				LIMITS UNLESS OTHERWISE SPECIFIED: FRACTIONS±NONE ANGLES± NONE DECIMALS ±NONE		GROUP CODE F 48		FILE CODE CONEXT		PART NO. 628042	