

PRODUCT INFORMATION PACKET

FASCO®

Model No: D1126

Catalog No: D1126

1/15 HP OEM Replacement Motor, 1550/1300 RPM, 208-230 Volts, 3.3" Diameter, OAO
HVAC/R OEM Replacement Motors



Regal and Fasco are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2019 Regal Beloit Corporation, All Rights Reserved. MC017097E

REGAL



Nameplate Specifications

Output HP	1/15 Hp	Output KW	0.05 kW
Frequency	60 Hz	Voltage	208-230 V
Current	1.10 A	Speed	1550/1300 rpm
Service Factor	1	Phase	1
Duty	Air Over	Insulation Class	B
Frame	3.3	Enclosure	Open Air Over
Thermal Protection	Thermally Protected	Ambient Temperature	40 °C
UL	Recognized	CSA	Y
CE	N		

Technical Specifications


Electrical Type	Shaded Pole	Starting Method	Across The Line
Poles	4	Rotation	Clockwise Shaft End
Mounting	Extended Studs	Drive End Bearing	Sleeve
Opp Drive End Bearing	Sleeve	Frame Material	Steel
Shaft Type	Flat	Overall Length	6.92 in
Frame Length	3.37 in	Shaft Diameter	0.313 in
Shaft Extension	3 in		

This is an uncontrolled document once printed or downloaded and is subject to change without notice. Date Created:29/10/2019

1



- NOTES:
- 1. STAKE STATOR TO MAIN FRAME PER 88830264.
 - 2. MAXIMUM TORQUE REQUIRED TO TURN MOTOR SHAFT IS 3/8 INCH-OUNCE.
 - 3. MAKE-UP WASHERS ARE TO BE ADDED OR DELTED TO ACHIEVE REQUIRED ENDPLAY.

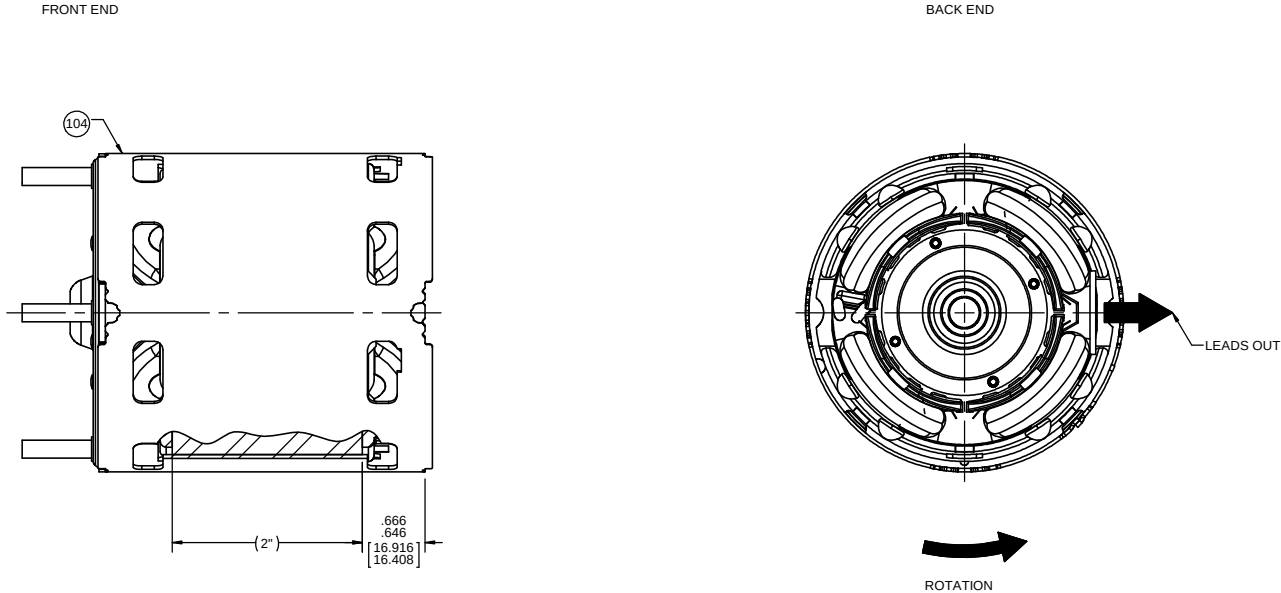

PACKING SPECIFICATIONS	
1.	PACK 1 PER CONTAINER, 45 CONTAINERS PER LAYER, 6 LAYERS PER PALLET, 270 MAX. PER PALLET. PACKING ASSY. 88834200.
2.	PLACE FOAM RING ON WELD BOLTS OPPOSITE SHAFT END OF MOTOR AND FILLER TUBE OVER SHAFT. PLACE MOTOR IN CARTON SHAFT UP. CLOSE FLAPS AND TAPE.
3.	CARTON LABELS MUST ALL FACE ONE DIRECTION TOWARD THE OPEN END OF THE PALLET. SEE 88834408.
4.	PLACE (1) FLAT PAD BETWEEN EACH LAYER. PLACE ALL INSPECTION STICKERS AND WRITING ON FLAT PAD.
5.	PLACE (4) NUTS IN PLASTIC BAG AND SECURE. PLACE BAG IN BOX.

DRAWING REVISION AB		REVISION BY MLS		DATE 3/17/2017		TOLERANCES UNLESS OTHERWISE SPECIFIED:				DRAWN BY MLS		 Regal Beloit America, Inc.	
ECO		APPROVED BY SED		DATE 3/17/2017		DEC.	INCH	mm	ANGLE	DATE 3/17/2017			
ECO-0119917						.X	±0.1	[±2.5]	1°	APPROVED BY SED			
ECO DESCRIPTION REVISED CORDSET MATERIAL PER CUST. REQUEST						.XX	±0.01	[±0.25]		DATE 3/17/2017			
						.XXX	±0.005	[±0.127]		REFERENCE			
						.XXXX	±0.0005	[±0.0127]					
						REMOVE BURRS & BREAK SHARP EDGES: .003/.015 [0.076/.381] X 45°							
						CORNER FILLETS: R.02 [51]				PROCESS/FINISH			
						MACHINED SURFACES: 125/3.2 INCH V/mm							
						mm SHOWN IN [BRACKETS]							